

**DEVELOP**

Dynamic balance


[www.develop.eu](http://www.develop.eu)



# ineo 3320



- > Black & white  
A4 multifunctional
- > Up to 33 ppm

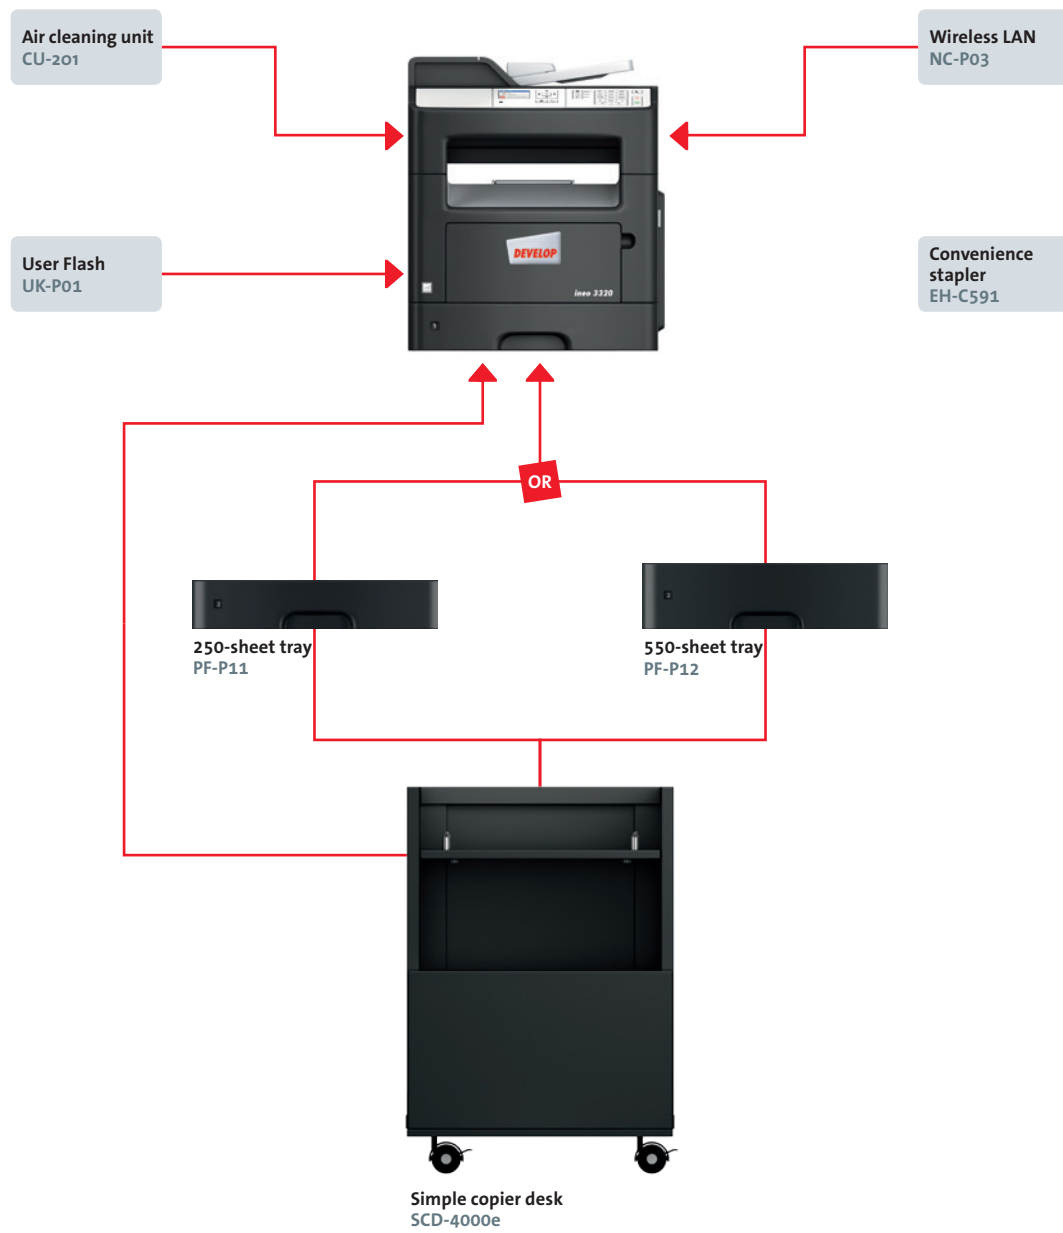

Finishing functionalities



Duplex

## ineo 3320

A4 All-in-One device with 33 ppm b/w. Standard print controller with PCL 5/6; PostScript 3; PDF 1.7 and XPS support. Paper capacity of 250 sheets and 50-sheet manual bypass. Media from A6 to A4 and 60–163 g/m<sup>2</sup>. 256 MB memory and 10 Base-T/100 Base-TX Ethernet standard

PF-P11 Paper tray	A5–A4; 250 sheets; 60–120 g/m <sup>2</sup>
PF-P12 Paper tray	A5–A4; 550 sheets; 60–120 g/m <sup>2</sup>

SCD-4000e Simple copier desk	Ensures ergonomic height and provides storage space for print media, etc.
UK-P01 User flash	256 MB User flash for storing fonts, forms and macros or to save job account log
NC-P03 Wireless LAN	Wireless LAN to network connector
EH-C591 Convenience stapler	Convenient stapling of up to 50 prints per set
CU-201 Air cleaning unit	Improves indoor air quality by reducing emissions

## Technical specifications

## SYSTEM SPECIFICATIONS

System memory	256 MB (standard)
Interface	10-Base-T/100-Base-TX Ethernet; USB 2.0; Wi-Fi 802.11 b/g/n (optional)
Network protocols	TCP/IP (IPv4 / IPv6); UDP; IPP; TCP; HTTP; HTTPS; SNMP; AppleTalk
Automatic document feeder	Up to 50 originals; A6–A4; 52–120 g/m <sup>2</sup>
Printable paper size	A6–A4; customised paper sizes
Printable paper weight	60–163 g/m <sup>2</sup>
Paper input capacity	Standard: 300 sheets Max.: 850 sheets
Tray 1	250 sheets; A6–A4; 60–90 g/m <sup>2</sup>
Tray 2 (optional)	250/550 sheets; A5–A4; 60–120 g/m <sup>2</sup>
Manual bypass	50 sheets; A6–A4; custom sizes
Automatic duplexing	A4; 60–90 g/m <sup>2</sup>
Output capacity	Max.: 150 sheets
Copy/print volume (monthly)	Rec.: 3,600 pages Max. <sup>(1)</sup> : 50,000 pages
Toner lifetime	10,000 pages
Imaging unit lifetime	60,000 pages
Power consumption	220–240 V / 50/60 Hz; less than 540 W
System dimensions (W x D x H)	389 x 472 x 468 mm
System weight	Approx. 20 kg

## COPIER SPECIFICATIONS

Copying process	Electrostatic laser
Copy/print speed A4	Up to 33 ppm
Autoduplex speed A4	Up to 14 ppm
1st copy out time	6.5 sec.
Copy resolution	600 x 600 dpi
Multicopy	1–999
Original format	A6–A4
Magnification	25–400%
Copy functions	Duplex; n-up; page insertion; overlay; electronic sorting

## PRINTER SPECIFICATIONS

Print resolution	1,200 x 1,200 dpi
Page description language	PCL 5/6; PostScript 3; XPS
Operating systems	Windows Vista (32/64); Windows 7 (32/64); Windows 8 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2; Windows Server 2012; Windows Server 2012 R2; Macintosh OS X 10.x; Linux; Citrix
Printer fonts	89 PCL Latin; 91 PostScript 3 Emulation Latin
Print functions	Duplex; n-up; watermark; cover sheet; electronic sorting; secure print
Mobile Printing	AirPrint (iOS), ineoPRINT (iOS & Android)

## SCANNER SPECIFICATIONS

Scan speed	Up to 42/19 ipm (mono/colour)
Scan resolution	Max.: 600 x 600 dpi
Scan modes	Scan-to-E-mail Scan-to-FTP Network TWAIN scan
File formats	PDF; TIFF; JPEG; XPS

## FAX SPECIFICATIONS

Fax standard	Super G3
Fax transmission	Analogue
Fax resolution	Max.: 600 x 600 dpi (ultra-fine)
Fax compression	MH; MR; MMR; JBIG; JPEG
Fax modem	Up to 33.6 Kbps
Fax destinations	400
Fax functions	Time shift; PC-Fax; up to 500 job programs; block Junk Fax banned fax list; fax server

## SYSTEM FEATURES

Security	SNMPv3; IPsec support; TCP/UDP port disabling; IEEE 802.1x support; secure print (print hold/PIN); certificate management
Software	Enterprise Device Manager ineo Remote Care (optional)

<sup>1</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

**Cartridge Return Program**

DEVELOP Return Program cartridges are patented print cartridges sold at a discount in exchange for the customer's agreement to the license requirement that the cartridges will be used only once and returned only to manufacturer for remanufacturing or recycling. These patented cartridges are licensed for single use only and will stop working after delivering a fixed amount of toner. Toner may remain in the cartridge when replacement is required.

Replacement cartridges sold without these restrictions (non-returnable cartridges) are also available. Please contact a DEVELOP representative for further details and availability.



**DEVELOP**

Konica Minolta Business Solutions Europe GmbH  
 Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 [www.develop.eu](http://www.develop.eu)



For more information regarding the ineo 3320 please refer to the respective product homepage

All data relating to the paper capacities of the document feeder, the final processing accessories and the paper cassettes apply to paper weighing 80 g/m<sup>2</sup> unless expressly stated otherwise. All data relating to the speed of printing, scanning or faxing apply to paper of an A4 format weighing 80 g/m<sup>2</sup> unless expressly stated otherwise.

All data relating to paper weights apply to media that are recommended by Konica Minolta. All technical data correspond to knowledge available at the time of going to print. Konica Minolta reserves the right to make technical alterations.

DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.

All other brand or product names are registered trademarks or product titles of their respective manufacturers. Konica Minolta does not accept any liability or guarantee for these products.

April 2016